




PCT/2003/000238 6 JUL 2004

10/501736

INVESTOR IN PEOPLE

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

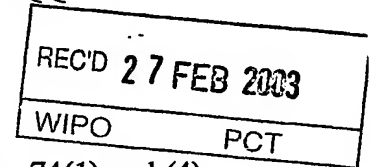

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely s the company to certain additional company law rules.

Signed

*L. McHoney*


Dated

7 February 2003

**BEST AVAILABLE COPY**

Patents Act 1977  
(Rule 16)

The  
Patent  
Office

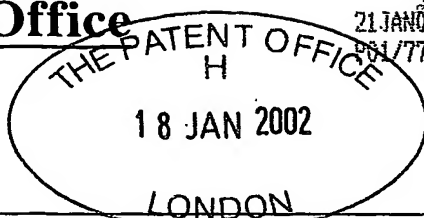

21 JAN 02 E689108-1 D02829  
861/7700 0.00-0201139.3

The Patent Office

Cardiff Road  
Newport  
Gwent NP10 8QQ

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference J00043863GB

2. Patent application number  
(The Patent Office will fill in this part) 18 JAN 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames) Inmarsat Ltd.  
99 City Road  
London  
EC1Y 1AX  
United Kingdom 0201139.3

Patents ADP number (if you know it)

647 3573002

If the applicant is a corporate body, give the country/state of its incorporation

GB

4. Title of the invention Communication Method, Apparatus, System and Signal

5. Name of your agent (if you have one) R.G.C. JENKINS & CO.

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

26 Caxton Street  
London  
SW1H 0RJ

Patents ADP number (if you know it) 950001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications (and if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d)) YES

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description 17 ✓

Claim(s) 5 ✓

Abstract 1 ✓

Drawing(s) 6 ✓ *h b*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

*R.G.C. Jenkins*

Date 18 January, 2002

R.G.C. JENKINS & CO

12. Name and daytime telephone number of person to contact in the United Kingdom

James Cross 020-7931-7141

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

b) Write your answers in capital letters using black ink or you may type them.

c) If there is not enough space for all relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.

e) Once you have filled in the form you must remember to sign and date it.

f) For details of the fee and ways to pay, please contact the Patent Office.

# **Communication Method, Apparatus, System and Signal Field of the Invention**

5 The present invention relates to a communication method, apparatus, system and signal, particularly but not exclusively for adapting parameters of a wireless interface to terminal type and/or link conditions.

## **Background of the Invention**

10 Adaptive power control techniques are known for adapting a wireless interface to link conditions. Furthermore, EP-A-0 772 317 describes a technique in which both power and forward error correction (FEC) coding are varied according to fading conditions at a receiver, which are reported to the transmitter using a low-bandwidth return link.

15 Also known are wireless communications systems which support different types of terminal with different characteristics. For example, the Inmarsat™ geostationary satellite system supports a number of different services, including Inmarsat-M™, Inmarsat mini-M™ and Inmarsat-M4™, each designed for different types of terminal. However, each service uses a separate, pre-defined set of channels each having a predefined channel type.

It would be advantageous to provide a flexible wireless interface that can be adapted to link conditions and/or terminal type.

20 It would also be advantageous to allow channels for different terminal types to be multiplexed onto the same bearer.

It would also be advantageous to allow channels multiplexed onto the same bearer to be adapted to link conditions independently of each other.

25 It would also be advantageous to provide a high degree of freedom in the adaptation of parameters of a wireless interface, while providing a simple way of selecting the most suitable parameter values for given conditions.

30 The document EP-A-878 924 discloses a TDMA communication system which allows mobile terminals to be set for working in any one of a number of different communication environments, such as a pedestrian environment, a vehicular environment, a satellite environment and an office

environment. The transmission format has a fixed frame length and number of bits per slot, but has different sets of values for power, modulation method, number of multiplexed signals, error correction, antenna gain, frequency hopping and diversity for each environment. A mobile station and base station  
5 select one of these sets for communication with each other. The selection may be manually by the mobile station user, automatically by the mobile station detecting broadcast messages from the base station indicating which environments are available, or automatically by estimation of the transmission channel.

10 The document EP 1 130 837 discloses a packet data burst format including a unique word, a header modulated with a default modulation and coding scheme and a payload modulated with a modulation and coding scheme specified by the header.

### 15 **Statement of the Invention**

According to one aspect of the present invention, there is provided a wireless communication method in which the parameters of bursts transmitted between a transmitter and a receiver are variable on a burst-by-burst basis, based on a quality metric of one or more bursts previously received by the  
20 receiver.

The parameters of said transmissions may be dependent on one or more properties of the receiver, such as antenna gain, pointing loss or HPA class.

Each burst may contain a plurality of packets addressed to a plurality  
25 of receivers and the parameters of that burst may depend on one or more properties of one or more of the receivers. For example, the parameters may depend on one or more properties of the least capable of the receivers to which the packets are addressed, such as the one having the lowest gain.

The parameters may be determined in part by the receiver and in part  
30 by the transmitter. For example, one or more parameters may be selected by

the receiver and instructed to the transmitter, and one or more other parameters may be selected by the transmitter.

5 The parameter values may be selected from one of a plurality of predetermined parameter value sets which represent only some of the possible combinations of parameter values. The parameter value sets may be determined so as to avoid redundancy in performance characteristics. Preferably, at least one subset of the parameter value sets is determined so that there is a substantially constant increment in gain between members of the subset ranked in order of increasing gain. Preferably, only one of the  
10 parameter values varies between members of the subset.

According to another aspect of the present invention, there is provided a method of multiplexing bursts into a frame of predetermined bandwidth, wherein the frame contains bursts of different bandwidths, each being a fraction of said predetermined bandwidth, and different periods.

15 According to another aspect of the present invention, there is provided a method of transmitting a burst comprising a plurality of FEC coded blocks, wherein the FEC coding rate varies among blocks within the burst.

According to another aspect of the present invention, there is provided a method of transmitting a burst including a unique word and a plurality of  
20 FEC coding blocks, wherein the unique word indicates the FEC coding rate of the first block and the first block identifies the coding rate of at least a subsequent one of the blocks which coding rate differs from that of the first block.

25 The scope of the present invention extends to apparatus, systems, signals, data structures and programs for carrying out any of the above methods.

### **Brief Description of the Drawings**

30 Specific embodiments of the present invention will now be described with reference to the accompanying drawings, in which:

Figure 1 is a schematic diagram of a satellite communications system in an embodiment of the present invention;

Figure 2 is a schematic diagram of a transmitter channel unit and a receiver channel unit in the embodiment;

5      Figure 3 is a diagram of an FEC encoder used in transmitter channel unit;

Figure 4 is a diagram of an SRCC coding module in the FEC encoder;

~~Figure 5 is a frequency/time diagram illustrating forward bearers~~  
sharing frequency channels;

10      Figure 6 is a frequency/time diagram illustrating return bearers sharing frequency channels;

Figure 7 is a diagram of one specific type of forward bearer format;

Figure 8 is a diagram of one specific type of return bearer format; and

15      Figure 9 is a diagram of an example of a forward bearer carrying multiple terminal connection packets with a varying coding rate.

### Detailed Description of Embodiments of the Invention

#### Mobile Satellite System

20      Figure 1 shows schematically a geostationary satellite communication system including one or more SASs which act as gateways to other communications networks NET for communication with any of a large number of network terminals NT. Each SAS is able to communicate with a plurality of MTs using radio frequency (RF) channels retransmitted by a  
25      geostationary satellite SAT. RF channel bandwidths of 90 kHz and 190 kHz are supported by the transponder design of the satellite. The feeder link transmitted and received between the SAS and the satellite comprises a set of frequency channels at C band, while the user link transmitted between the  
30      MTs and the satellite comprises a set of frequency channels at L band. A transmission in the direction from the SAS to one or more of the MTs is referred to as a forward link, while a transmission in the direction from one of the MTs to the SAS is referred to as a return link. Channel conditions on the

feeder link may vary depending on atmospheric conditions and sources of interference. Channel conditions on the user link may also vary depending on atmospheric conditions and sources of interference, which may depend on the position of the relevant MT. Hence, user link conditions may vary between  
5 MTs.

### Satellite

The satellite SAT includes a beam former, receive antenna and transmit antenna (not shown) which generate substantially congruent receive  
10 and transmit beam patterns. Each beam pattern consists of a global beam GB, a small number of overlapping regional beams RB which are narrower than and fall substantially within the global beam, and a large number of spot beams SB (only two of which are shown, for clarity) which are narrower than the regional beams and may fall either within or outside the regional beams,  
15 but fall substantially within the global beam. Each spot beam may or may not overlap another spot beam, and at least some of the spot beams are steerable so that their area of coverage on the earth's surface can be changed.

The satellite includes a transponder which maps each C-band frequency channel received in the feeder link onto a corresponding L-band  
20 frequency channel transmitted in a specified beam in the user link, and maps each L-band frequency channel received in each beam in the user link onto a corresponding frequency channel in the feeder link. The mapping between frequency channels can be altered under the control of a telemetry, tracking and control (TTC) station. The satellite SAT acts as a 'bent pipe' and does not  
25 demodulate or modify the format of the signals within each frequency channel.

One example of parameters of a spot beam is given below.



**Table 1 – Satellite Spot beam Parameters**

Satellite Parameter	Forward	Return
NPR	17	20
Co-channel level (50%)	19	19
L-Band G/T (dB/K)	-10	10
Transponder gain	180	182
EIRP (dBW) per carrier	44	-

**Terminal Types**

5           The satellite communication system is designed to provide simultaneous services to a very large number of MTs 4 of different types. For example, a handheld (HH) terminal has very low RF power, an antenna which is substantially omnidirectional in azimuth, and typical dimensions of 10 cm × 5 cm × 1 cm. A pocket-sized or A5 terminal has low RF power, a directional

10           antenna ANT with small aperture and typical dimensions of 20 cm × 15 cm × 2 cm. A notebook-sized or A4 terminal has medium RF power, a directional antenna of medium aperture and typical dimensions of 30 cm × 20 cm × 3 cm. A briefcase-sized or A3 terminal has high RF power, a directional antenna of

15           large aperture and typical dimensions of 40 cm × 30 cm × 5 cm.

          In one example, the parameters of the terminal types are as shown in Tables 1 and 2 below:

**Table 2 – Terminal Parameters**

Terminal Parameter	HH	A5	A4	A3
Target L-band fade margin	4.5	3.7	3.1	2.5
G/T	-23	-18	-12	-9
RF Power (W)	1.5	1.9	2.8	7.2
Antenna gain	3.5	7.5	12	15.2
Pointing loss	0.4	0.8	1.2	1.5
Max EIRP towards satellite	4.6	8.6	13.6	20.9

**20           Channel Unit Details**

          Figure 2 shows the functions of a transmitter channel unit TCU, which performs the encoding and modulation of signals for transmission over a

single frequency channel, and of a receiver channel unit RCU, which performs the demodulation and decoding of a signals received on a single frequency channel. The SAS contains multiple such TCUs and RCUs, sufficient for the maximum number of received and transmitted frequency channels in the feeder link. The MT contains at least one TCU and one RCU.

A hardware adaptation layer HAL provides an interface between the channel units and higher-level software which controls the settings of the channel units, handles the demodulated received signals and outputs the signals for transmission. The higher-level software may include a medium access control (MAC) layer which maps logical channels onto bearer connections and bearer connections onto the physical layer, as described for example in EP-A-0 993 149.

In the TCU, the HAL outputs data blocks of a predetermined but variable block size which are scrambled by a scrambler SCR and redundancy encoded by an encoder ENC at a coding rate CR set by the HAL.

Data and parity bits are output from the encoder ENC to a transmit synchroniser SYNC which formats the bits into modulation sets, each of which determines the modulation state of one modulated symbol, for output to a modulator MOD which modulates the sets according to a variable modulation scheme MS output by the HAL. Unique word (UW) symbols are also input to the synchroniser SYNC for output in accordance with a selected air interface format as will be described below. The output timing of the encoder ENC, transmit synchroniser SYNC and modulator MOD is controlled by the HAL, which also selects the output frequency of the channel unit by controlling a transmit frequency  $f_T$  of an upconverter UP, the output of which is transmitted by an antenna ANT to the satellite SAT.

In the RCU, a frequency channel is received by the RF antenna ANT (or by a separate receive antenna), down-converted by mixing with a downconversion frequency signal at a downconverter DN at a reception frequency  $f_R$  controlled by the HAL, and demodulated by a demodulator DEM according to a modulation scheme MS output by the HAL.

The frame timing of the bursts is determined by a receive timing detector DET which detects the UW. The demodulated burst is decoded by a decoder DEC according to a coding rate CR output by the HAL and descrambled by a descrambler DES. The data contents of the burst are then received by the HAL.

The receive timing may be determined by a decoder-assisted frame synchronisation technique, as described for example in patent application no. GB 0102448.8, or in the paper 'Decoder-assisted frame synchronisation for Turbo coded systems', Howlader, Wu and Woerner, 2<sup>nd</sup> International Symposium on Turbo Codes, Brest, Sept. 2000.

#### FEC Coder Details

In a preferred embodiment, the encoder ENC performs a Turbo encoding algorithm such as described generally in the paper 'Near Shannon limit error-correcting coding and decoding: Turbo codes', Berrou, C., Glavieux, A. and Thitimajshima, P, *Proc. of ICC '93*, pp 1064-1070 or with enhancements such as described in WO99/34521. The Turbo coder, as shown in Figure 3, consists of a buffer BUF and an interleaver INT which both receive data bits d in parallel and output the data bits to respective identical 16-state Systematic Recursive Convolutional Code encoders SRCC which respective streams of parity bits p, q. The unencoded data bits p, and the parity bits p, q are output to a puncturer PUNC which generates modulation sets of bits from all of the data bits d and some of the parity bits p, q according to a puncturing matrix which determines which of the parity bits p, q are selected for transmission, and hence the coding rate. The puncturing matrix can be modified to change the coding rate CR, as indicated by the HAL.

The size of the interleaver INT determines the encoder block size; a block of data bits d is loaded into the buffer BUF and the interleaver INT, the block of data bits d is encoded by the SRCC encoders and the punctured bits are output by the puncturer PUNC.

Figure 4 shows the structure of either of the SRCC encoders. Input data bits  $d$  are supplied in parallel to a systematic data output and to a recursive convolutional encoder comprising four shift registers  $T$  and binary adders, arranged as shown in Figure 4 to output the parity bits  $p$  or  $q$ . The backward polynomial is  $23_8$  and the forward polynomial is  $35_8$ :

Backward polynomial:  $1 + X^3 + X^4$

Forward polynomial:  $1 + X + X^2 + X^4$

The SRCC encoders are initialised by setting the shift registers  $T$  to a zero state before each block of data bits  $d$  so that their output does not depend on the bits from any previous block. No flush bits are added.

Any suitable algorithm, such as the well-known MAP or SOVA algorithms, may be used in the decoder DEC.

#### **Bearer Types**

It is not possible to provide a single air interface standard which optimises the transmission rate available to the larger terminals while maintaining communication with the smallest terminals. This problem is solved by supporting a plurality of different bearer types defined by their symbol rate and modulation scheme.

Each bearer is defined as a burst within a frame or slot in a Time Division Multiplex (TDM)/Time Division Multiple Access (TDMA)/Frequency Division Multiple Access (FDMA) scheme; in other words, bearers are separated by frequency (FDMA), each frequency channel is divided into periodic frames, each frame either containing one bearer or being divided into two or more timeslots each containing a bearer. In the forward direction, different bearers are assigned to different frames which are multiplexed together in the same frequency channel (TDM). In the return direction, different terminals may transmit bearers in different time slots which may be in the same frequency channel (TDMA). The frame period is 80 ms and the time slot period may be 80, 20 or 5 ms.

The supported bearer parameters are as follows:

**Table 3 – Bearer Parameters**

Modulation	Symbol Rate (kS/s)
4-ary (OQPSK, QPSK), 16QAM	16.8, 33.6, 67.2, 151.2

However, not all possible combinations are supported, because some are redundant and others do not provide suitable performance for any type of communication in any beam with any terminal.

The supported bearer types are identified herein by a code of format DPTRM indicating direction D, burst period P, type T (which is used merely as a separator), symbol rate R, and modulation M as follows:

**Table 4 – Bearer Parameter Codes**

D	P (ms)	R (33.6 kS/s)	M
F = Forward	80	0.25	X = 16-QAM
R = Return	20	0.5	Q = OQPSK
	5	1	
		2	
		4	
		4.5	
		5	

For example, the code F80T4.5X means a forward bearer with 80 ms burst length, symbol rate 151.2 kS/s, 16-QAM modulation. Optional code suffixes 2B or 4B may be added to indicate the number of FEC blocks which the bearer burst contains. Each FEC block is FEC encoded independently.

The supported bearers, together with their associated bandwidth, are shown below in Table 5:

**Table 5 – Supported Bearers**

Code	Bandwidth (kHz)
R20T0.5Q	21
F80T1Q4B	42
F80T1X4B	42
R20T1Q	42
R20T1X	42
R20T2X	84
R5T2X	84
R20T2Q	84

R5T2Q	84
F80T4.5X	189
R20T4.5Q	189
R5T4.5Q	189
R20T4.5X	189
R5T4.5X	189

However, R5T4.5Q and R5T4.5X are optional as their data rate is equivalent to that of the R20T1 bearers but they are less bandwidth efficient. Furthermore, some other possible bearers may be implemented for backwards compatibility with existing systems, such as F80T1X2B and F80T1Q2B.

### Shared Frequency Channels

Each frequency channel transmitted by the satellite may be shared in frequency between different bearers each occupying less than one half of the available bandwidth. For example, a 190 kHz frequency channel may contain two 84 kHz bearers, four 42 kHz bearers, eight 21 kHz bearers, or a combination of these. Likewise, a 90 kHz frequency channel may contain two 42 kHz bearers, four 21 kHz bearers or a combination of these such as one 42 kHz bearer and two 21 kHz bearers. Forward bearers which are adjacent in frequency and have the same modulation scheme are transmitted synchronously, allowing simultaneous demodulation of multiple bearers by the MTs. The MTs are able to receive up to four adjacent bearers in this way. This adds flexibility in the data rate and/or channel type provided to an MT. For example, two 42 kHz bearers may be assigned to an MT where a single 84 kHz or 189 kHz bearer is not available, such as in a regional beam RB. One bearer may be used for unicast data stream or signalling and the second could be a broadcast/multicast bearer. Hence, bearer acquisition need only be performed once for multiple synchronous bearers. Moreover, symbol timing may be synchronised between successive frames to assist the MTs in acquiring timing. Even where the coding rate of a block is too high for an MT to decode successfully, the MT may still detect the symbol timing and will therefore be able to decode subsequent blocks with lower coding rates.

An example of shared forward frequency channels is shown in Figure 5, in which a first 200 kHz channel contains two F80T1X and two F80T1Q bearers, while a second 200 kHz channel contains one F80T4.5X bearer. Figure 5 shows the same shared frequency channel format between two adjacent frames, but adjacent frames may contain different shared channel formats. For example, the modulation scheme may be varied on each frequency subchannel between frames, and an MT receiving that subchannel may automatically detect any changes in modulation between frames.

Automatic detection is facilitated by selecting from modulation schemes which are sub- or supersets of one another (e.g. QPSK and 16QAM).

An example of shared return frequency channels is shown in Figure 6, in which one frame of a 200 kHz channel contains the following bearer types multiplexed in frequency and time: R5T1X ( $\times 8$ ), R5T2Q, R5T2X ( $\times 3$ ), R20T1Q, R20T1X, R20T2X, R20T4.5Q, R20T4.5X.

The sharing schedule of each return frequency channel is controlled by the SAS and transmitted in Return Schedule packets in the forward bearers. The return schedule dictates the bearer types and their arrangement within a frame.

## 20 Coding Rate Subtypes

Each bearer type comprises a set of subtypes having different FEC coding rates to provide different carrier to noise ratios C/No. The subtypes are identified by codes as shown below in Tables 6 and 7 for 4-ary and QAM bearers respectively. The exact coding rate values are optimised for each bearer type in such a way that the data payload carries an integer number of octets.

**Table 6 - Subtypes for 4-ary bearers**

Subtype	L8	L7	L6	L5	L4	L3	L2	L1	RE	H1
Code Rate	1/3	2/5	1/2	5/9	5/8	2/3	3/4	4/5	5/6	7/8

**Table 7 - Subtypes for QAM bearers**

Subtype	L3	L2	L1	RE	H1	H2	H3	H4	H5	H6
Code Rate	1/3	2/5	4/9	1/2	4/7	5/8	2/3	3/4	4/5	6/7

For each bearer type, a range of discrete coding rates is selected to give progressive changes of approximately 1 dB in the C/No performance of the bearer, as described below.

5

### Forward Frame Format

The forward bearer formats include an initial UW and distributed pilot symbols. The frame duration is 80 ms.

10 Bearer types F80T1Q4B and F80T1X4B are low bandwidth high-penetration bearers used for communicating with small aperture terminals, and for signalling. Each frame is divided into four 20 ms FEC blocks.

15 An example of the F80T1Q4B format is shown in Figure 7. In this example, an initial UW of 40 symbols (1.19 ms duration) is followed by four FEC blocks FB<sub>1</sub> to FB<sub>4</sub> each of 640 symbols (19.05 ms duration), including one pilot symbol after every 29 FEC symbols, giving a total of 29 pilot symbols per frame.

The possible coding rate subtypes for the F80T1Q4B bearer, together with the associated data rate, C/No requirement for burst error rate of  $10^{-3}$ , step in C/No requirement, and Eb/No is shown below in Table 8:

20

**Table 8 – F80T1Q4B Coding Rate Subtype Performance**

Coding Rate Subtype	Data Rate (kBit/s)	C/No Required (dBHz)	C/No Step (dBHz)	Eb/No (dB)
L8	21.6	44.98	-	1.43
L7	25.6	45.84	0.86	1.55
L6	30.4	46.82	0.98	1.78
L5	35.2	47.71	0.89	2.04
L4	40.0	48.60	0.89	2.37
L3	44.8	49.53	0.93	2.81
L2	49.2	50.46	0.93	3.33



L1	52.8	51.52	1.06	4.09
RE	55.6	52.49	0.97	4.83

Bearer type F80T4.5X is a high bandwidth low penetration bearer used for traffic data. Each frame is subdivided into eight 10 ms blocks to reduce latency, so that this bearer is suitable for voice and video-conferencing applications.

5

### Return Burst Formats

The duration of return bursts may be either 5 ms or 20 ms, the 5 ms burst length being chosen for low-latency applications. There is only one FEC block per burst except for the highest symbol rate ( $R = 4.5, 151.2 \text{ kS/s}$ ) where there are two FEC blocks to avoid an excessive memory requirement for the FEC encoders. On the other hand, a block size of less than about 20 octets is not viable because the turbo decoder performance starts to degrade when the data payload is lower than this threshold. This places a lower limit on the other parameters for a 5ms slot: a minimum symbol rate of 33.6 kS/s with 16-QAM modulation or 67.2 kS/s with 4-ary modulation.

15

An example of the R20T4.5X bearer structure is shown in Figure 8 and comprises a guard time interval GT of 54 symbol periods in which no symbols are transmitted, a preamble CW of 18 symbols, initial unique word UW1, two FEC blocks FB1 and FB2, and final unique word UW2. The coding rate subtypes and associated performance metrics are shown below in Table 7:

20

**Table 7 – R20T4.5X Coding Rate Subtype Performance**

<b>Coding Rate Subtype</b>	<b>Data Rate (kBit/s)</b>	<b>C/No Required (dBHz)</b>	<b>C/No Step (dBHz)</b>	<b>Eb/No (dB)</b>
L3	192.8	55.73	-	2.68
L2	225.6	56.71	0.98	2.98
L1	258.4	57.66	0.95	3.34
R	292.0	58.58	0.92	3.73
H1	332.0	59.64	1.06	4.23
H2	372.0	60.69	1.05	4.79
H3	408.0	61.66	0.97	5.36
H4	448.0	62.76	1.10	6.05
H5	475.2	63.75	0.99	6.78
H6	492.8	64.68	0.93	7.55

**Adaptive Coding Rate**

For all bearer types, the coding rate is variable and can be set independently for each FEC block. The coding rate may be varied in response to the measured C/No for that bearer to achieve a burst error rate performance of  $10^{-3}$ . The SAS measures the C/No for each return bearer, determines whether any change to the coding rate is required, and if so signals the required change to the MT transmitting that bearer. The SAS makes a corresponding change in the coding rate to any forward bearers transmitted to that MT. The MT may also measure the C/No for a received forward bearer and, if the C/No value falls outside a predetermined range and subsequently no instructions to change the coding rate are received from the SAS within a timeout period, the MT may change the coding rate of its transmitted return bearers so as to compensate for the channel conditions on the return link, on the assumption that the channel conditions are symmetrical on the forward and return links.

Alternatively, the coding rate of the transmitted return bearers may be determined entirely by the MT based on received on the measured C/No of the forward bearer, and is not signalled by the SAS.

5 In forward bearers, the coding rate for the first FEC block in a burst is signalled by the initial UW in that burst; the UW is selected by the TCU from a set of UWs, each corresponding to the different coding rate subtypes. Any coding rate changes for subsequent FEC blocks in the burst are signalled by a broadcast signalling packet contained in the first FEC block; if there is no change, this packet is omitted.

10 In return bearers, the coding rate is also indicated in the initial UW selected by the MT. The symbol rate may also be adjusted on a burst-by-burst basis and is determined by the return schedules as described above.

#### **Power Save Mode**

15 If there is no data to send in any block of a frame of a 16-QAM bearer, a predefined transmit sequence is transmitted in which dummy data symbols occupy only the inner points of the 16-QAM constellation, while the pilot symbols occupy their normal outer constellation points. This saves approximately 6 db in transmit power.

20

#### **Shared Forward Bearers**

To optimise the use of satellite bandwidth, a single forward bearer may contain data addressed to multiple MTs of differing gain. This either restricts the maximum data rate achievable on the bearer, or precludes service to smaller aperture terminals. Furthermore, where the available bandwidth is limited in a beam, or where the receiving MTs are unable to process high bandwidth signals, narrow band (42 kHz) bearers will be used. The mean power of a forward bearer is fixed for the duration of the frame and is set to provide a link of at least threshold performance with the least capable receiving MT.

25

30

In the example shown in Figure 9, a bearer contains a UW which indicates an initial coding rate of  $1/3$  and four FEC blocks FB1 to FB4. The first block FB1 contains a bulletin board packet containing a bulletin board header BB and a coding rate attribute value pair AVP which indicates that the coding rates for the blocks FB2 to FB4 are  $2/3$ ,  $4/5$  and  $4/5$  respectively. The initial coding rate of  $1/3$  is chosen so that the least capable of the MTs receiving this bearer will be able to receive the bulletin board packet. An MT which determines that it will be unable to decode blocks of higher coding rate may save power by not demodulating those blocks. Blocks FB2 and FB3 contain packets CON1, CON2 and CON3 corresponding to connections to different MTs. The packet CON2 is split over the block boundary and therefore the MT receiving this packet must be able to decode successfully at a coding rate of  $4/5$ .

Where possible, packets addressed to MTs of the same type are assigned to the same bearer, so that the transmission performance is not limited for more capable MTs by the presence of packets addressed to less capable MTs on the same bearer. However, in low traffic conditions, packets addressed to different types of MT may be assigned to the same bearer so as to conserve bandwidth. As the traffic level increases, selected MTs may be migrated onto other bearers so as to group them together with other MTs of the same type.

### Alternative Applications

Embodiments of the present invention may be applied to many different types of wireless communication system, including without limitation geostationary, geosynchronous and non-geosynchronous satellite communication systems and terrestrial wireless communication systems.

**Claims**

1. A method of wireless transmission between a transmitter and a receiver, the method comprising, at the transmitter: receiving a command from the receiver setting one or more transmission parameters, varying at least one transmission parameter, and transmitting a communication to the receiver using said transmission parameters.  
5

---

2. A method according to claim 1, wherein said communication comprises a plurality of bursts and said transmission parameters vary between bursts.  
10
3. A method according to claim 2, wherein said at least one transmission parameter is set dependent on a reception quality of one or more of said bursts previously received from the transmitter by the receiver.
4. A method according to claim 2 or 3, wherein said at least one parameters are varied dependent on a reception quality of one or more transmissions transmitted from the receiver to the transmitter.  
15

---

5. A method according to any preceding claim, wherein the at least one varied parameter includes at least one of the one or more parameters set by the receiver.  
20
6. A method according to any one of claims 1 to 4, wherein the at least one varied parameter is different from the one or more parameters set by the receiver.
7. A method of wireless transmission from a transmitter to a receiver, the method comprising, at the transmitter: determining a type of the receiver from a set of possible types, selecting a transmission parameter value dependent on said type, and transmitting a burst to the receiver using said selected transmission parameter value.  
25

8. A method according to claim 7, wherein said types represent different antenna gains.
9. A method according to claim 7 or 8, wherein said types represent different pointing losses.
- 5 10. A method according to any one of claims 7 to 9, wherein said types represent different amplifier gains.
11. A method of wireless transmission from a transmitter to a plurality of receivers, wherein the transmission includes a plurality of packets addressed respectively to the receivers, the method including determining the least capable of the receivers and selecting one or more parameters of the transmission so as to match the least capable of the receivers.
- 10 12. A method according to claim 11, wherein the transmission comprises a forward error-corrected block and the coding rate of the forward error-corrected block is selected to match the least capable of the receivers.
- 15 13. A method of wireless transmission from a transmitter to a plurality of receivers, wherein the transmission comprises a burst containing a plurality of forward error-corrected blocks, at least one of which includes part or all of a plurality of packets addressed to different ones of said plurality of receivers and has a coding rate selected so as to match the capabilities of the least capable of the receivers to which the packets are addressed.
- 20 14. A method according to claim 13, wherein at least some of the packets are split between different forward error-corrected blocks.
- 25 15. A method of assigning a plurality of packets addressed to a respective plurality of wireless receivers to a plurality of bearers, the method comprising identifying the receiving capabilities of the wireless receivers and assigning packets addressed to those of the

receivers having similar receiving capabilities onto the same one of said bearers.

- 5 16. A method of assigning a plurality of receivers to a plurality of bearers for reception of packets addressed to the receivers, the method comprising: in a first, low traffic condition, assigning packets to a smaller number of bearers containing packets addressed to receivers of differing receiving capabilities, and in a

10 second, high traffic condition, assigning packets to a greater number of bearers and assigning packets addressed to those of the receivers having similar receiving capabilities onto the same one of said greater number of bearers.

- 15 17. A method of transmission from a transmitter to a receiver over a wireless channel using a plurality of variable transmission parameters, comprising selecting a combination of said transmission parameters from a set of combinations of said transmission parameters which comprises a subset of all possible combinations of said parameters, such that the performance characteristics over the wireless channel of each of the set of combinations of transmission parameters differs from those of the other ones of the set.

- 20 18. A method of transmission from a transmitter to a receiver over a wireless channel using a selected plurality of transmission parameters and a discretely variable transmission parameter, such that successive values of the discretely variable transmission parameter provide a substantially constant change in gain over the
- 25 wireless channel.

- 30 19. A method of multiplexing a plurality of bursts onto a frame of predetermined period in a frequency channel of predetermined bandwidth, wherein at least some of the bursts occupy mutually different fractions of said predetermined bandwidth.

20. A method according to claim 19, wherein at least some of the bursts occupy mutually different fractions of said predetermined period.
- 5 21. A method of transmitting a plurality of forward error corrected blocks within a burst, wherein the forward error-correction coding rate varies among the forward error corrected blocks.
- 10 22. A method according to claim 21, wherein the burst includes a header indicating the coding rate of one of the blocks and said one of the blocks contains data indicating the coding rate of a subsequent one or more of the blocks.
23. A method according to claim 22, wherein said one of the blocks is a first one of the blocks.
- 15 24. A method according to claim 21 or 22, wherein the blocks contain packets addressed to a plurality of receivers of different receiving capabilities and the coding rate indicated in the header is selected so that the one of the blocks is receivable by the least capable of said receivers.
25. A method according to any one of claims 21 to 24, wherein said header comprises a variable unique word.
- 20 26. A method of transmitting a data burst comprising a unique word and a plurality of blocks, wherein the unique word is variable and indicates the transmission scheme of at least one of said blocks, and said at least one block indicates the transmission scheme of at least one other of said blocks.
- 25 27. A signal generated by a method according to any one of claims 19 to 26.
28. Apparatus arranged to perform the method of any one of claims 1 to 26.



29. A method substantially as herein described with reference to the accompanying drawings.
-

**Abstract****Communication Method, Apparatus, System and Signal**

5 A wireless communication system uses an adaptive air interface in which burst parameters are variable on a burst-by-burst basis, based on the reception quality of previous bursts and/or properties of the receiver or receivers of the burst. The parameter values are selected as sets which represent only some of the possible combinations of parameter values, to avoid redundancy in performance characteristics. Coding rates are selected to give a substantially constant increment in gain. Each burst may contain  
10 multiple FEC blocks with different coding rates. A unique word indicates the FEC coding rate of the first block and the first block identifies the coding rate of each of the subsequent blocks.

[Fig. 9]

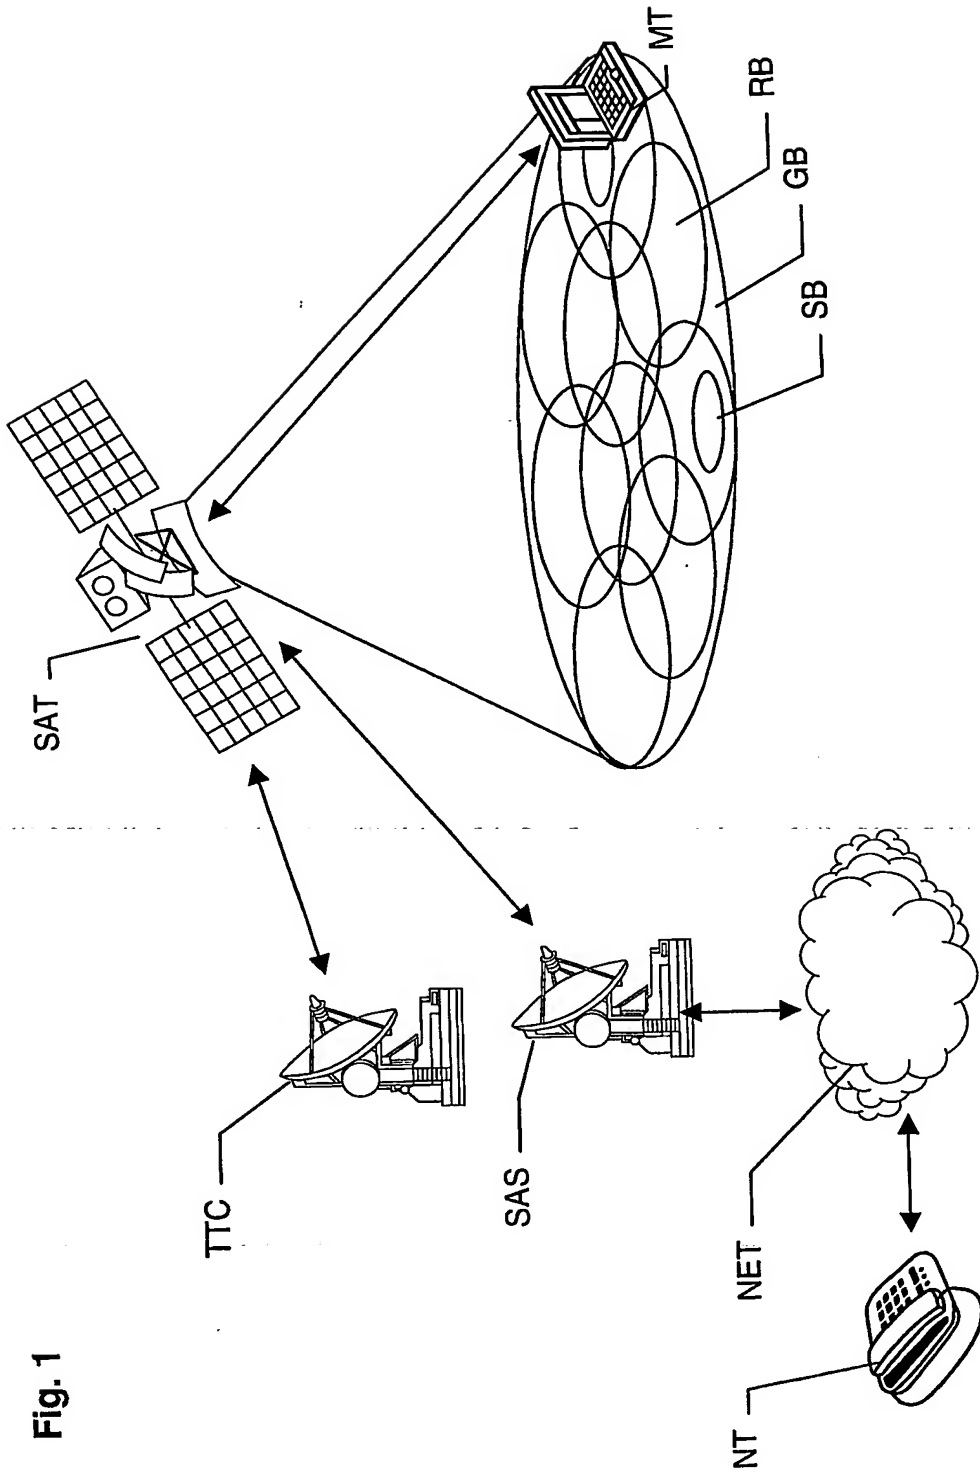
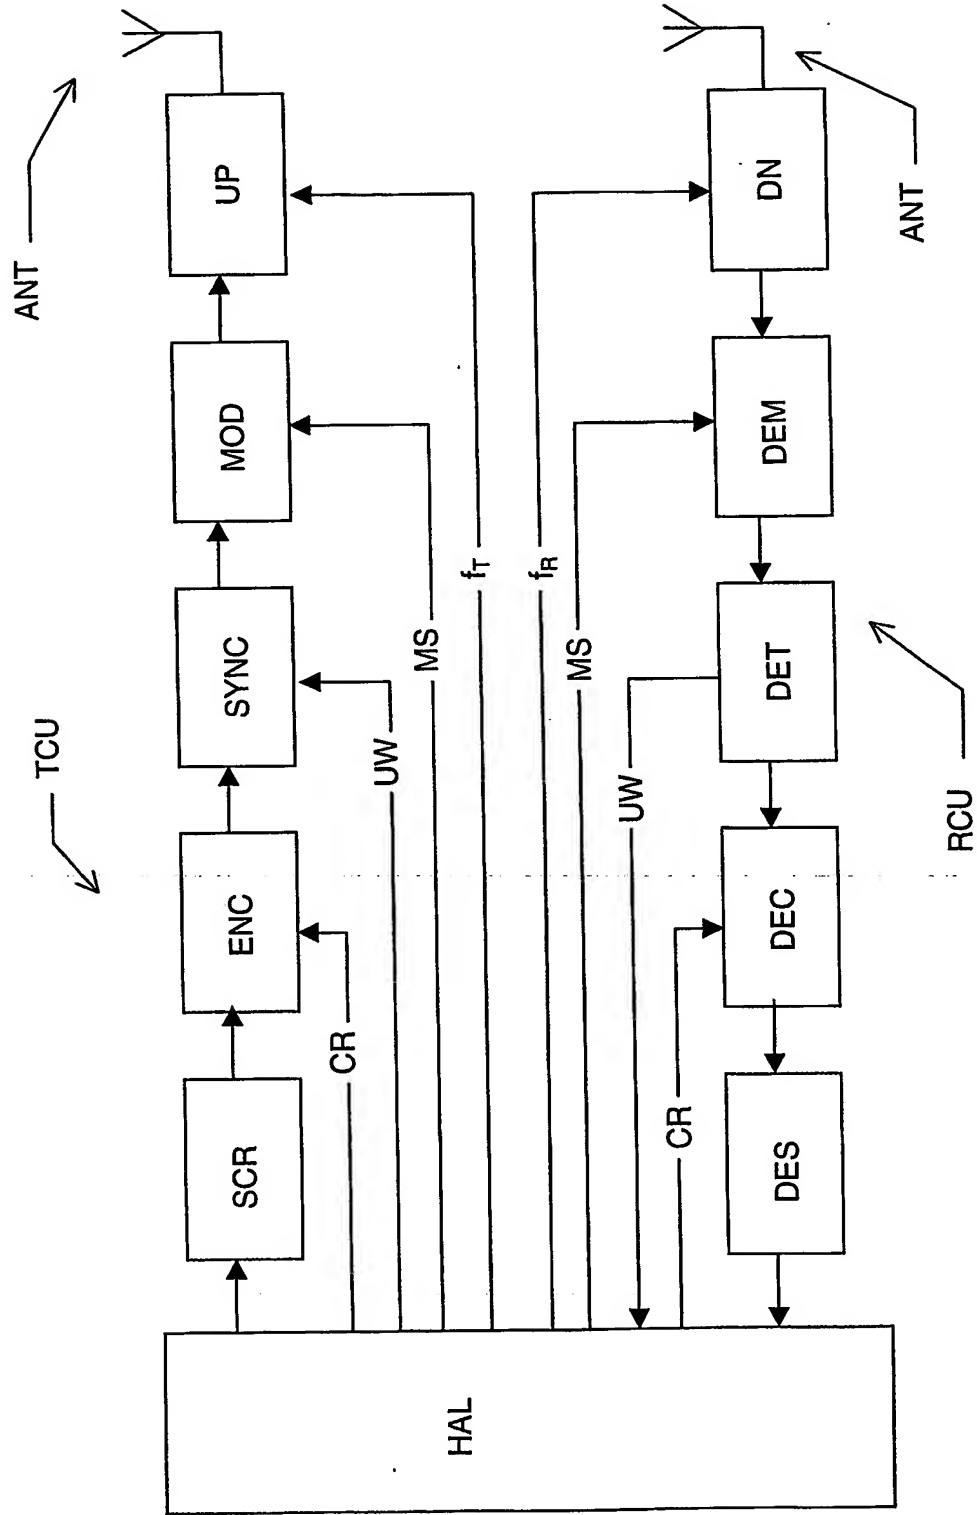


Fig. 1

Fig. 2



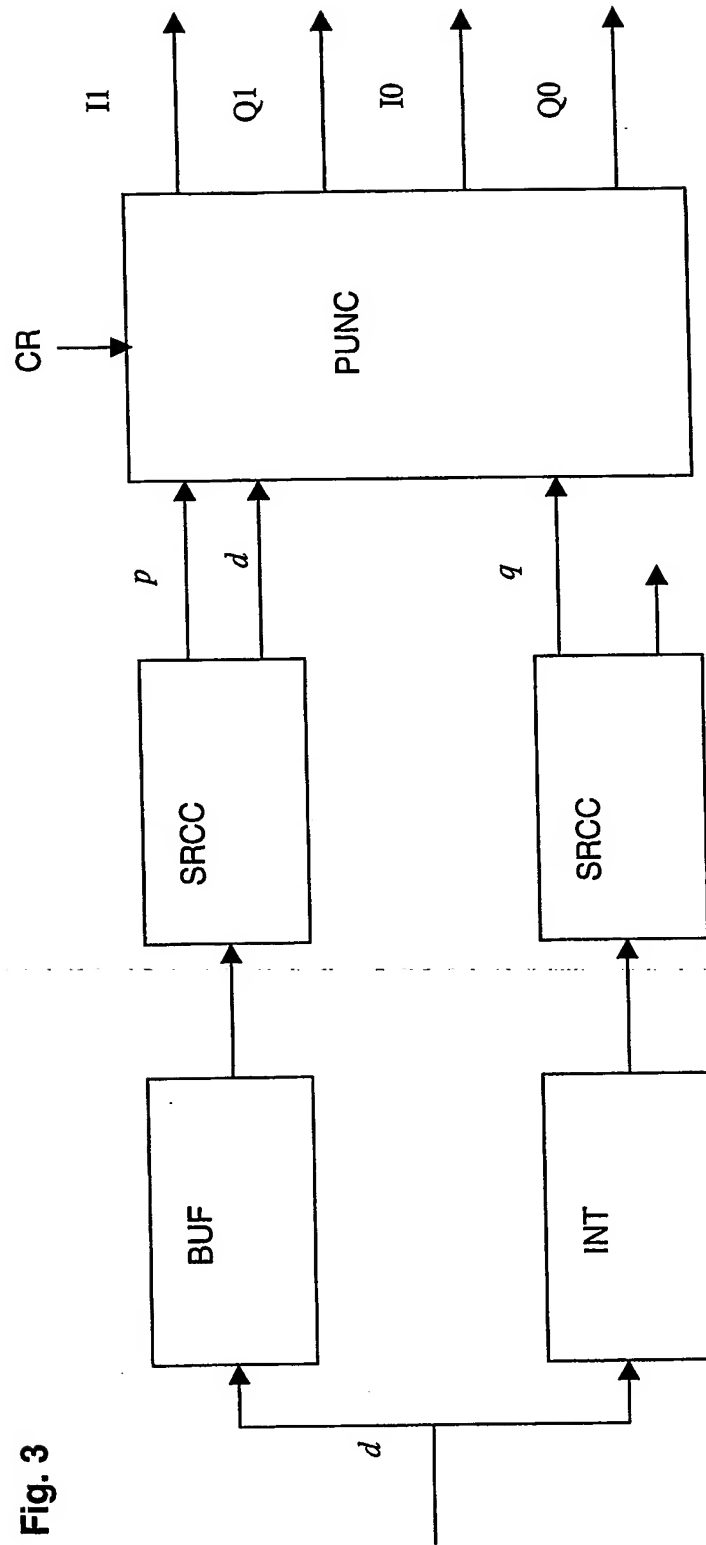
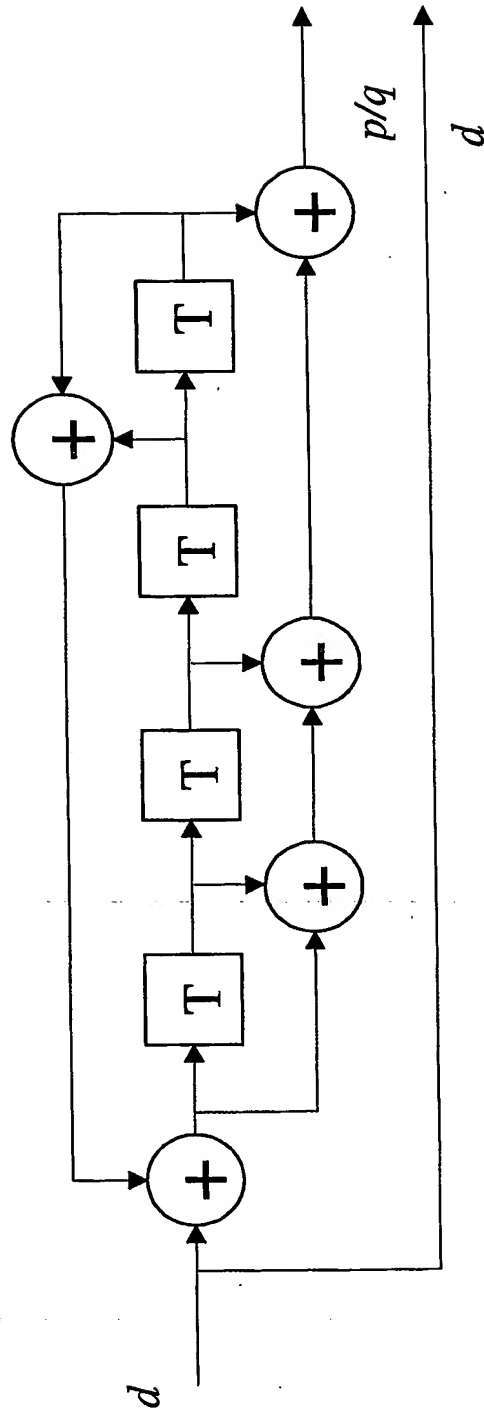
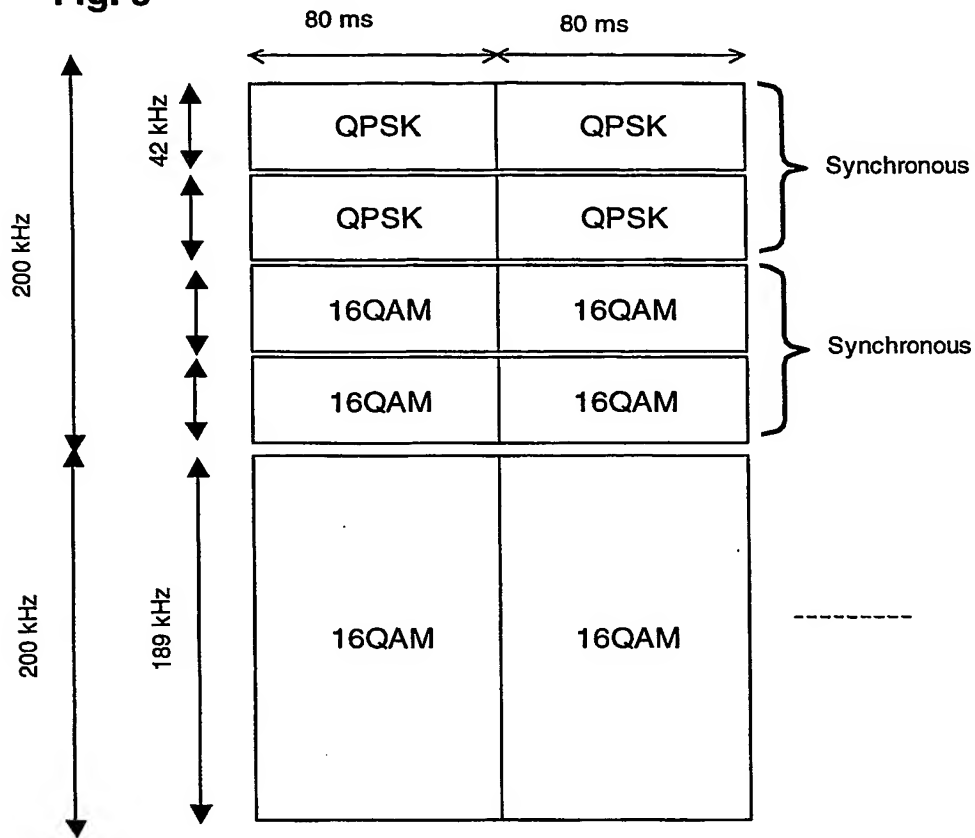
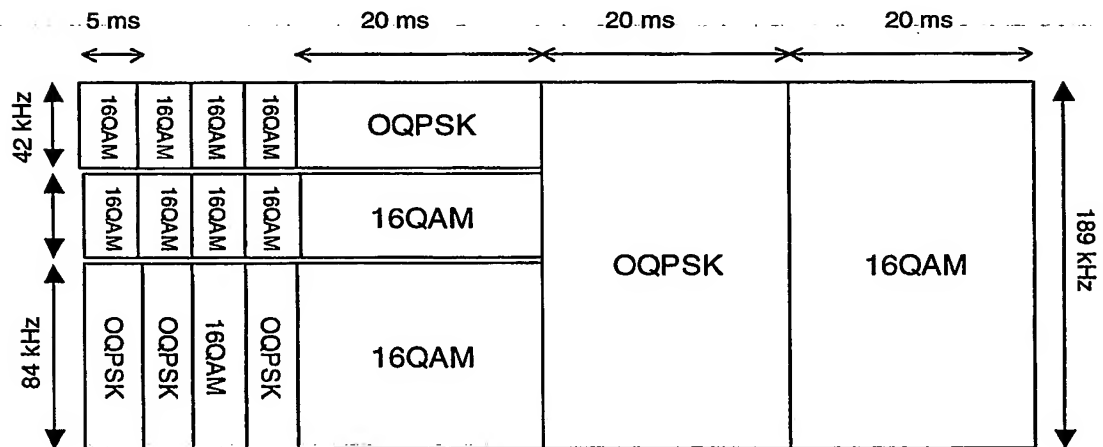


Fig. 3

Fig. 4



**Fig. 5****Fig. 6**

**Fig. 7**

Symbols	UW	FB1	FB2	FB3	FB4
	40	640	640	640	640
	1.19 ms	19.05 ms	19.05 ms	19.05 ms	19.05 ms

**Fig. 8**

Symbols	GT	CW	UW <sub>1</sub>	FB1	FB2	UW <sub>2</sub>
	54	18	40	1446	1446	20
	0.36 ms	0.12 ms	0.26 ms	9.56 ms	9.56 ms	0.13ms

**Fig. 9**

FB1			FB2		FB3		FB4
UW	BB	AVP	CON1	CON2	CON3		
CR	1/3		2/3		4/5	4/5	



---

THE PATENT OFFICE  
10 FEB 2003  
Received in Patents  
International Unit

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**